



BIAXIAL GEOGRID DELIVERS COST-EFFECTIVE GROUND STABILISATION

PRODUCT USED

Biaxial Geogrid

- · Made from polypropylene and engineered to provide load support in both longitudinal and transverse directions, it is ideal for stabilising subgrades and pavements
- Reduces aggregate layer thickness without compromising performance, lowering excavation and fill costs
- Enhances layer stiffness to allow the use of lower-quality or recycled fill materials, reducing material costs
- Speeds up installation, offering a fast, costeffective stabilisation solution for roads, working platforms and heavy-vehicle pavements

Similar Product

Geofabrics® Geogrid™ Biaxial

PROJECT DESCRIPTION

In 2017, the new 11-storey building on South Esplanade, Glenelg Foreshore, presented a unique engineering challenge. The building, which included a two-level basement car park, was constructed on extremely soft ground consisting of loose dune sand with an assumed CBR of 2%.

To enable piling for the project, a working platform capable of supporting the maximum proposed piling loads of 340 kPa was required. A cost-effective and structurally reliable solution was needed to stabilise the soft ground and support the piling loads.

OUR SOLUTION

The project team utilised a biaxial geogrid to reduce the required platform depth without compromising performance or strength. The final design featured a 400-millimetre-deep pavement over the biaxial geogrid, laid directly on the existing dune sand. The biaxial geogrid layer stabilised the platform effectively, providing the required support that would otherwise have only been achieved with a deeper pavement. This approach delivered significant cost savings while maintaining the structural integrity of the working platform.






Durable Load Support

Savings without compromising performance





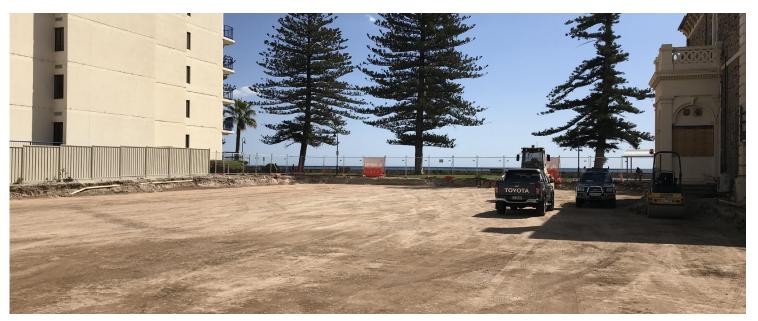

Visit **geofabrics.co** or call 1300 60 60 20 (AU) or **geofabrics.co.nz** or call 0800 60 60 20 (NZ)





