

RENO MATTRESSES GALFAN & PVC COATED

The Reno mattress is a structure made of hexagonal double twisted wire mesh, with mechanical characteristics higher than the ones suggested from EN 10223-3 (Figs. 1, 2). Reno mattresses are filled with stones at the project site to form flexible and permeable, monolithic structures such as river bank protection and channel linings for erosion control.

The steel wire used to manufacture the mattress is heavily galvanized with Galfan, a Zn-5%Al-MM (mischmetal) alloy. A PVC coating is then applied to provide added protection for use in aggressive environments where soil or water are acidic: in salt or fresh water, or wherever the risk of corrosion is present. The PVC coating has a nominal thickness of 0.50 mm. The standard combinations of mesh and wire are shown in Tab. 2. In order to reinforce the structure, all mesh panel edges are selvaged with a wire having a greater diameter (Tab. 3). Reno mattresses are divided into uniformly partitioned cells by internal diaphragms.

Dimensions and sizes of Reno mattresses are shown in Tab. 1. **Wire**
All tests on wire must be performed prior to manufacturing the mesh.

- Tensile strength:** the wire used for the manufacture of Reno mattresses and the lacing wire, shall have a tensile strength between 350-550 kg/mm² exceeding, in order to increase the tensile resistance of the finished products, what is suggested from EN 10223-3. Wire tolerances (Tab. 3) are in accordance with EN 10218 (Class T1).
- Elongation:** Elongation shall not be less than 9%, exceeding, in order to increase the tensile resistance of the finished products, what is suggested from EN 10223-3. Test must be carried out on a sample at least 25 cm long.
- Galfan coating:** minimum quantities of Galfan shown at Tab.3 meet the requirements of EN 10244-2 (Table 2 and Class A).
- Adhesion of Galfan:** the adhesion of the Galfan coating to the wire shall be such that, when the wire is wrapped six turns around a mandrel having four times the diameter of the wire, it does not flake or crack when rubbing it with the bare fingers.

P.V.C. (Polyvinyl Chloride) Coating

The technical characteristics and the resistance of the PVC to ageing meet the relevant standards. The main values for the PVC material, according to EN 10245-2, are as follows:

- Colour:** grey-RAL 7037, according to ASTM D1482-57T;
- Specific gravity:** 1.30-1.35 kg/dm³ in accordance with ASTM D792 Table 1;
- Hardness:** between 50 and 60 Shore D, according to ASTM D 2240;
- Tensile strength:** not less than 20.6 MPa, according to ASTM D412-92;
- Elongation at break:** not less than 200%, in accordance with ASTM D412-92;
- Weight loss:** less than 5%, after 24 hrs at 105°C, test method ASTM D2287-92;
- Residual ashes:** less than 2%, according to ASTM D2124-62T;
- Abrasion resistance:** loss in volume shall be less than 0.30 cm³, according to ASTM D1242-92, test method A.

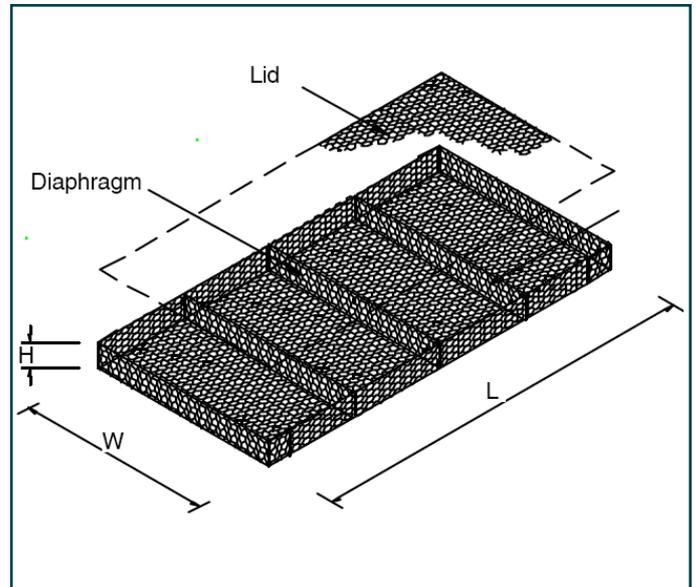


Figure 1

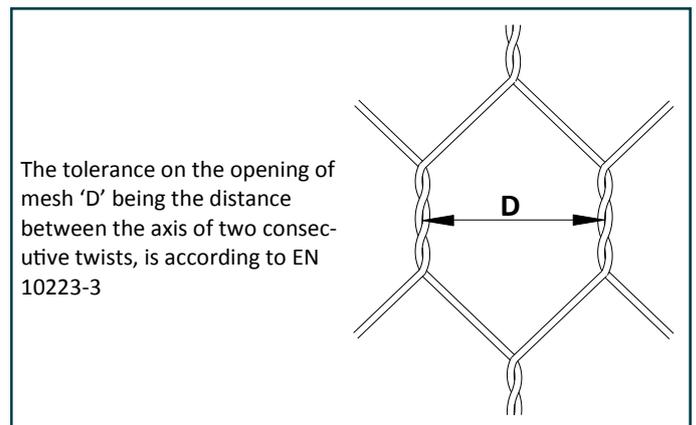


Figure 2

The accelerated ageing tests are:

- Salt spray test:** test period 1,500 hrs, test method ASTM B117-94;
- Exposure to UV rays:** test period 2,000 hours at 63°C, test method ASTM D1499-92a and ASTM G23-93 apparatus Type E;
- Exposure to high temperatures:** 24 hrs at 105°C, according to ASTM D1203 and ASTM D2287;
- Brittleness temperature:** Cold-bend less than -30°C test method BS 2782-104A; Cold-flex less than +15°C, test method BS 2782-151A.

The properties after ageing tests shall be as follows:

- Appearance of coating:** no cracking, stripping or air bubbles, and no appreciable variation in color;
- Specific Gravity:** variations shall not exceed 6%; Hardness: variations shall not exceed 10%;
- Tensile strength and elongation:** var. shall not exceed 25%;
- Abrasion resistance:** variations shall not exceed 10%;
- Brittleness temperature:** Cold-bend shall not exceed -20°C. Cold-flex shall not exceed +18°C.

1. Table of sizes for Reno mattresses

L=Length (m)	W=Width (m)	H=Height (m)	Mesh type
6	2	0.17	6 x 8
6	2	0.23	6 x 8
6	2	0.30	6 x 8

All sizes and dimensions are nominal.
Tolerances of $\pm 3\%$ of the width and $\pm 2.5\text{cm}$ on the height, of the Reno mattress shall be permitted.

2. Standard Mesh-Wire

Type	D (mm)	Tolerance	Internal Wire Dia (mm)	External Wire Dia (mm)
6x8/ Galfan+PVC	60	$\pm 16\%/-4\%$	2.00	3.00

3. Standard wire diameters

	Mesh Wire	Selvedge Wire	Lacing Wire
Internal Wire Diameter	\varnothing mm	2.0	2.2
Wire Tolerance	(\pm) \varnothing mm	0.06	0.06
Min. Quantity of Galfan	gr/m ²	220	230

Lacing Operations

Lacing operations can be made by using the tools shown in Fig.5. Stainless steel rings having the following specification can be used instead of lacing wire (Fig.4):

Stainless steel rings for PVC coated products

- diameter: 3.05 mm, **ASTM A313, Type 302, Class I**
- tensile strength: 1530-1745 MPa, **ASTM A313-92.**

Spacing of the rings must not exceed 200 mm (Fig.3)

Quantity Request

When requesting a quote, please specify:

- size of units (length x width x height, see Fig.1),
- type of mesh,
- type of coating

EXAMPLE: No. 100 Reno mattress **6x2x0.23m** - Mesh type **6x8** - Galfan + PVC coated

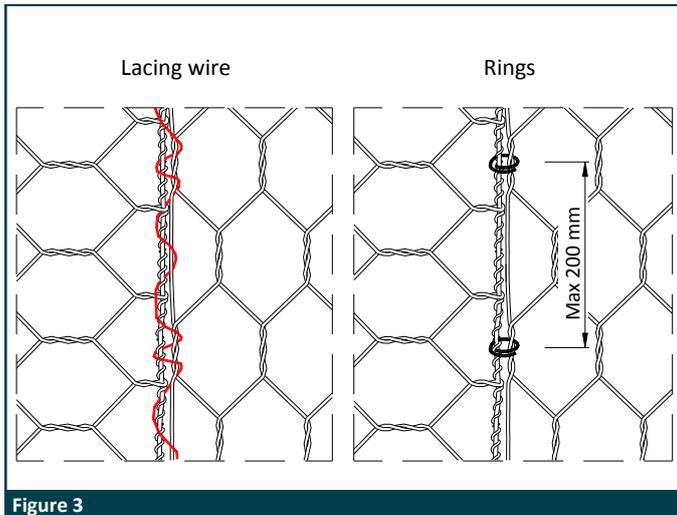


Figure 3

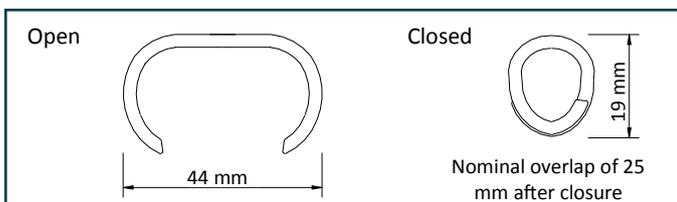


Figure 4

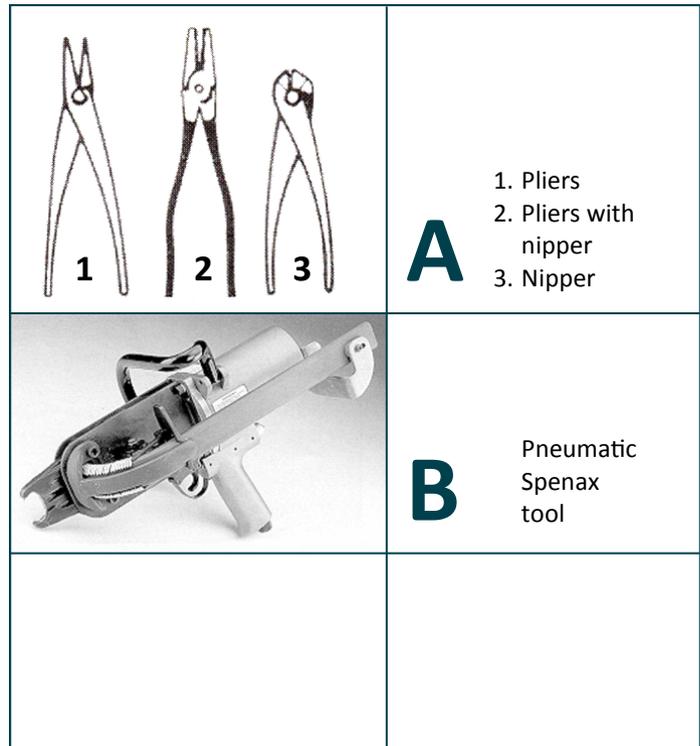


Figure 5

Geofabrics New Zealand Ltd

14 Goodman Place, PO Box 12536, Penrose, Auckland, New Zealand
T: (+64) 9 6436495 F: (+64) 9 634 6492, FREEPHONE 0800 60 60 20
E: sales@geofabrics.co.nz
www.geofabrics.co.nz

The information contained in this brochure is general in nature. In particular the content of this brochure does not take account of specific conditions that may be present at your site. Site conditions may alter the performance and longevity of the product and in extreme cases may make the product wholly unsuitable. Actual dimensions and performance may vary. If your project requires accuracy to a certain specified tolerance level you must advise us before ordering the product from us. We can then advise whether the product will meet the required tolerances. Where provided, installation instructions cover installation of product in site conditions that are conducive to its use and optimum performance. If you have any doubts as to the installation instructions or their application to your site, please contact us for clarification before commencing installation. This brochure should not be used for construction purposes and in all cases we recommend that advice be obtained from a suitably qualified consulting engineer or industry specialist before proceeding with installation. This brochure is current as at the date printed below. Geofabrics New Zealand Ltd may make amendments to this document at any time. Please refer to our website, or contact our nearest sales office to ensure you have the most current version. © Copyright held by Geofabrics New Zealand Ltd. All rights are reserved and no part of this publication may be copied without prior permission.